



HSF 4...M

4 flute medium flat

HARDMILL

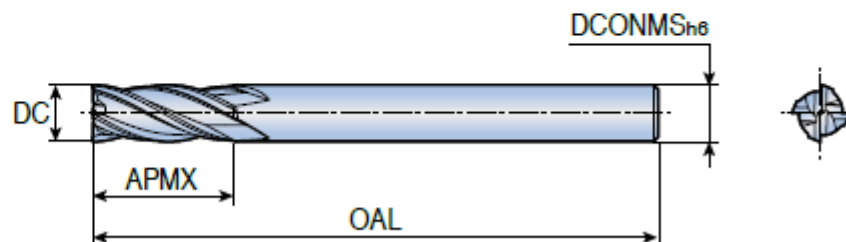

DC	Tolerance
DC ≤ 6	0 - -0.010
DC > 6	0 - -0.015

Designation	Feed (mm/tooth)	Dimension (mm)				Grade
		DC	OAL	APMX	DCONMS	
HSF 4060M 150	0.067-0.100	6.0	60	15.0	6.0	●
4080M 200	0.090-0.120	8.0	65	20.0	8.0	●
4100M 250	0.117-0.130	10.0	70	25.0	10.0	●
4120M 300	0.126-0.168	12.0	80	30.0	12.0	●

●: Standard items