



TSE 4...M

4-зубая плоская фреза средней длины

APEX MILL

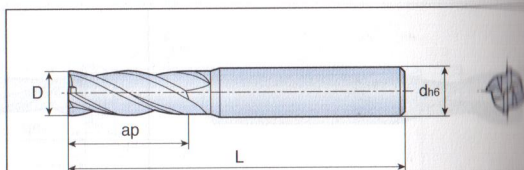

D	Допуск
Все	0 - +0.020

Обозначение	Подача (мм/зуб)	Размеры (мм)				Сплав		
		D	L	ap	d	TT5515	TT5525	UF10
TSE 4020M	0.008-0.017	2.0	42	6	6	•	•	•
4025M-4	0.008-0.017	2.5	40	8	4	•	•	•
4025M	0.008-0.017	2.5	42	8	6	•	•	•
4030M	0.009-0.020	3.0	57	10	6	•	•	•
4035M-4	0.010-0.028	3.5	50	12	4	•	•	•
4035M	0.010-0.028	3.5	47	10	6	•	•	•
4040M-4	0.010-0.042	4.0	50	12	4	•	•	•
4040M	0.010-0.042	4.0	57	12	6	•	•	•
4045M	0.010-0.042	4.5	57	12	6	•	•	•
4050M	0.020-0.059	5.0	57	14	6	•	•	•
4060M	0.020-0.075	6.0	57	16	6	•	•	•
4070M	0.020-0.075	7.0	60	20	8	•	•	•
4080M	0.030-0.100	8.0	63	20	8	•	•	•
4090M	0.030-0.100	9.0	68	25	10	•	•	•
4100M	0.030-0.120	10.0	72	22	10	•	•	•
4110M	0.030-0.120	11.0	76	30	12	•	•	•
4120M	0.030-0.136	12.0	83	25	12	•	•	•
4130M	0.030-0.136	13.0	85	35	14	•	•	•
4140M-14	0.030-0.136	14.0	83	25	14	•	•	•
4150M	0.040-0.140	15.0	92	32	16	•	•	•
4160M	0.040-0.146	16.0	92	32	16	•	•	•
4180M-18	0.050-0.146	18.0	92	32	18	•	•	•
4200M	0.050-0.146	20.0	104	38	20	•	•	•
4250M	0.050-0.146	25.0	140	65	25	•	•	•



• Хвостовик Велдон доступен по запросу (Пример заказа: TSEW 4...M)

• Стандартная позиция

NES 2...LT

4-зубая плоская удлиненная фреза

APEX MILL



D	Допуск
Все	0 - -0.020

Обозначение	Подача (мм/зуб)	Размеры (мм)				Сплав	
		D	L	ap	d	TT5515	TT5525
NES 2030LT	0.010-0.040	3	70	10	6	•	•
2040LT	0.020-0.050	4	70	12	6	•	•
2050LT	0.020-0.060	5	80	15	6	•	•
2060LT	0.030-0.076	6	80	15	6	•	•
2080LT	0.030-0.097	8	90	20	8	•	•
2100LT	0.030-0.107	10	100	25	10	•	•
2120LT	0.040-0.108	12	110	30	12	•	•
2140LT	0.040-0.120	14	125	35	16	•	•
2160LT	0.040-0.130	16	125	40	16	•	•
2180LT	0.050-0.130	18	150	45	20	•	•
2200LT	0.050-0.130	20	150	45	20	•	•

• Стандартная позиция